


## TV SOUND CHANNEL

- HIGH SENSITIVITY
- EXCELLENT AM REJECTION
- DC VOLUME CONTROL
- PERITELEVISION FACILITY
- 4W OUTPUT POWER
- LOW DISTORTION
- THERMAL PROTECTION
- TURN-ON AND TURN-OFF MUTING



**DIP20**  
(Plastic Package)

**ORDER CODE : TDA8191**


### DESCRIPTION

The TDA8191 is a monolithic integrated circuit that includes all the functions needed for a complete TV sound channel. The TDA8191 is assembled in a 20 pin dual in line power package.

### PIN CONNECTION

TURN-ON AND TURN-OFF MUTING	<input type="checkbox"/>	1	20	<input type="checkbox"/> AF PA INPUT
SOUND IF INPUT	<input type="checkbox"/>	2	19	<input type="checkbox"/> AF PA FEEDBACK
IF DECOUPLING	<input type="checkbox"/>	3	18	<input type="checkbox"/> SUPPLY VOLTAGE
IF DECOUPLING	<input type="checkbox"/>	4	17	<input type="checkbox"/> AF PA OUTPUT
GND	<input type="checkbox"/>	5	16	<input type="checkbox"/> GND
GND	<input type="checkbox"/>	6	15	<input type="checkbox"/> GND
DETECTOR (FM)	<input type="checkbox"/>	7	14	<input type="checkbox"/> DCVC OUTPUT
DETECTOR (FM)	<input type="checkbox"/>	8	13	<input type="checkbox"/> VOLUME CONTROL
DEEMPHASIS AND AF OUT	<input type="checkbox"/>	9	12	<input type="checkbox"/> REF. VOLTAGE
AF INPUT	<input type="checkbox"/>	10	11	<input type="checkbox"/> FUNCTION SWITCH

## BLOCK DIAGRAM

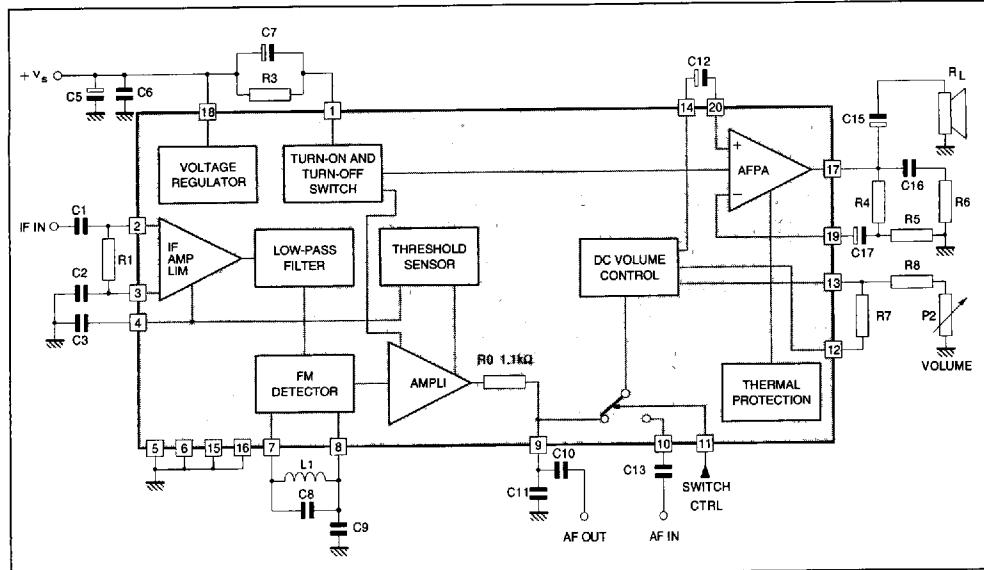

8191-02-EP5

8191-01-TBL

8191-02-TBL

## ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
$V_S$	Supply Voltage (pin 18)	28	V
$V_I$	Voltage at Pin 1	$\pm V_S$	
$V_I$	Input Voltage (pin 2)	1	$V_{PP}$
$I_O$	Output Peak Current (repetitive)	1.5	A
$I_O$	Output Peak Current (non repetitive)	2	A
$P_{tot}$	Total Power Dissipation : at $T_{pins} = 90^\circ C$ at $T_{amb} = 70^\circ C$	4.3 1	W W
$T_{sig}, T_j$	Storage and Junction Temperature	- 40 to 150	$^\circ C$

## THERMAL DATA

Symbol	Parameter	Value	Unit
$R_{th} (j-pins)$	Junction-pins Thermal Resistance	Max	$^\circ C/W$
$R_{th} (j-a)$	Junction-ambient Thermal Resistance	Max	$^\circ C/W$

## ELECTRICAL CHARACTERISTICS

(Refer to fig. 1 ;  $V_S = 24V$ ,  $R_L = 16\Omega$ , Pin 11 floating,  $\Delta f = \pm 50kHz$ ,  $V_i = 1mV$ ,  $f_0 = 5.5MHz$ ,  $f_m = 1kHz$ ,  $T_{amb} = 25^\circ C$  unless otherwise specified)


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_S$	Supply Voltage (Pin 18)	$V_C = 4.5V$	10.8	24	27	V
$V_O$	Quiescent Output Voltage (Pin 17)	$V_C = 4.5V$	11	12	13	V
$V_I$	Pin 1 DC Voltage	$V_C = 4.5V$		5.3		V
$I_O$	Quiescent Drain Current	$V_C = 4.5V$		35		mA
$V_I$	Input Limiting Voltage at Pin 2 (-3dB)	$V_O = 4VRMS$	50	100		$\mu V$

8191-03-TBL


**ELECTRICAL CHARACTERISTICS (continued)**

(Refer to fig. 1 ;  $V_S = 24V$ ,  $R_L = 16\Omega$ , Pin 11 floating,  $\Delta f = \pm 50\text{kHz}$ ,  $V_i = 1\text{mV}$ ,  $f_0 = 5.5\text{MHz}$ ,  $f_m = 1\text{kHz}$ ,  $T_{amb} = 25^\circ\text{C}$  unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_g$	Recovered Audio Voltage (pin 9)	$V_C = 4.5V$ , $\Delta f = \pm 15\text{kHz}$	200		400	$\text{mVRMS}$
$R_g$	Deemphasis Resistance	$f = 20\text{Hz}$ to $20\text{kHz}$	500	700	1000	$\Omega$
AMR	Amplitude Modul. Rejection	$m = 0.3$ , $V_O = 4\text{VRMS}$	45	60		$\text{dB}$
$R_I$	Input Resistance (pin 2)	$\Delta f = 0$		30		$\text{k}\Omega$
$C_I$	Input Capacitance (pin 2)	$\Delta f = 0$ , $V_C = 4.5V$		6		$\text{pF}$
$V_{12}$	DCVC Reference Voltage		5.6		6.2	$\text{V}$
$K_V$	Volume Attenuation	$V_C = 0.5V$ ; Fig. 2 $V_C = 4.5V$ ; Fig. 2	80		1.0	$\text{dB}$ $\text{dB}$
$\frac{\Delta K_V}{\Delta T_j}$	Volume Attenuation Thermal Drift	$T_j = 300$ to $380^\circ\text{K}$ Fig. 3		- 0.05	- 0.1	$\text{dB}/^\circ\text{C}$
$P_O$	Output Power ( $d = 10\%$ )		3.5	4		$\text{W}$
SVR	Supply Voltage Rej. (Pin 17) (Pin 9)	$V_C = 4.5V$ $f_{ripple} = 100\text{Hz}$	20 50	26 60		$\text{dB}$ $\text{dB}$
$V_{11}$	Function Switch. - Television Broadc. Reproduction		0		2	$\text{V}$
	- Peritelevision Reproduction		8		12	$\text{V}$
$R_{11}$	Input Resistance		10			$\text{k}\Omega$
$V_{10}$	Input Voltage ( $d \leq 2\%$ )	$V_O = 4\text{VRMS}$ ; $V_{11} = 12V$		0.5	2.0	$\text{VRMS}$
$R_{10}$	Input Resistance	$f = 20\text{Hz}$ to $20\text{kHz}$	10			$\text{k}\Omega$
CT	Crosstalk between Pins 9, 10		60			$\text{dB}$
$S+N/N$	Signal to Noise Ratio	$\Delta f = 0$ ; $V_O = 4\text{VRMS}$	60	70		$\text{dB}$
$d$	Distortion ( $P_O = 250\text{mV}$ )				2	$\%$
$\Delta f$	Deviation Sens.	$V_C = 0.5V$ ; $V_O = 4\text{VRMS}$		$\pm 4$	$\pm 10$	$\text{kHz}$

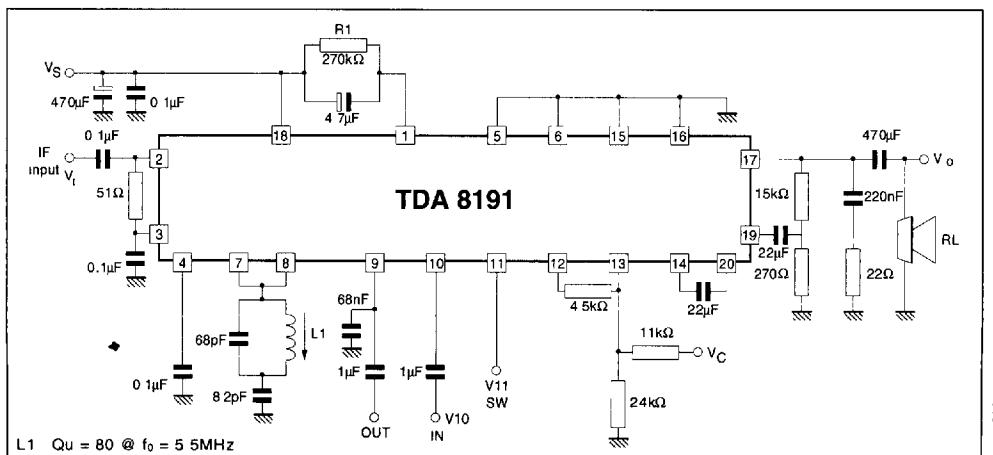
**Figure 1 : Test Circuit**

## TYPICAL APPLICATION

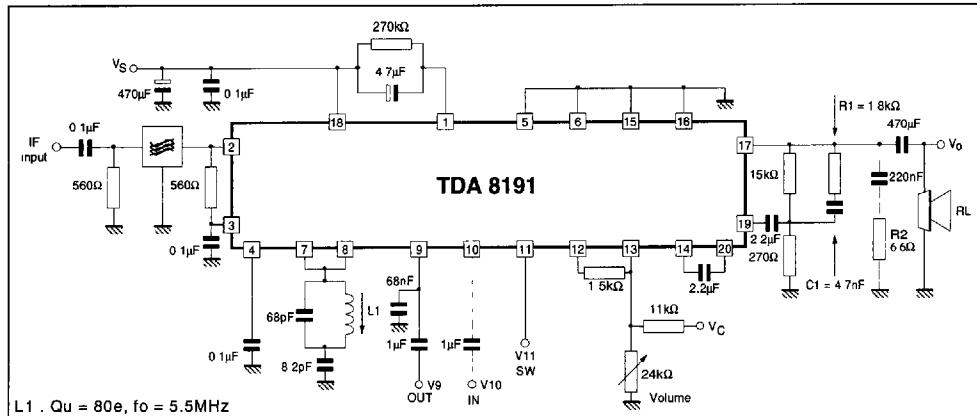


**Figure 2 :** Volume Attenuation versus DC Volume Control Voltage


**Figure 3 :** Volume Attenuation Thermal Drift




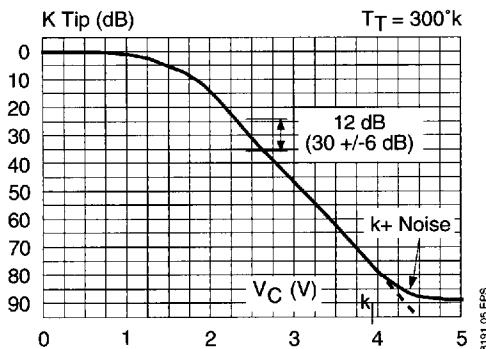


**Figure 4 :** Relative Audio Output Voltage and Output Noise versus Input Signal

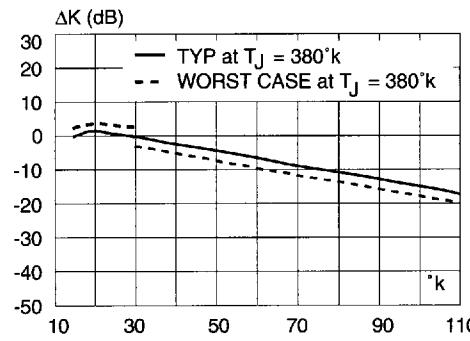

**Figure 5 :** Distortion versus Output Power

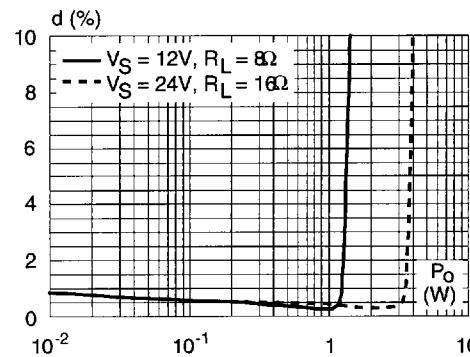

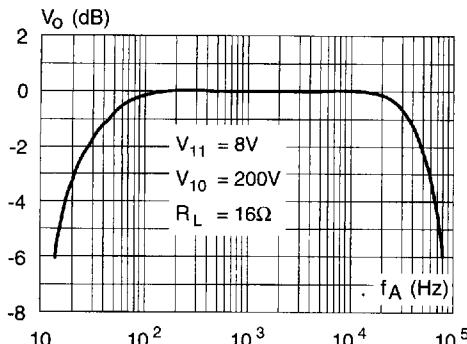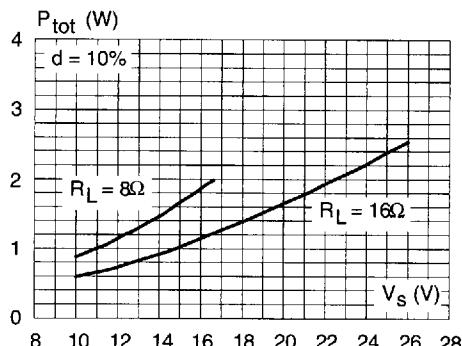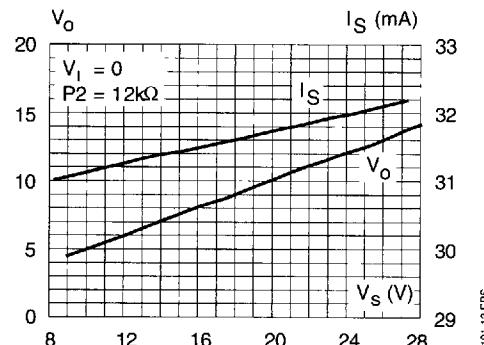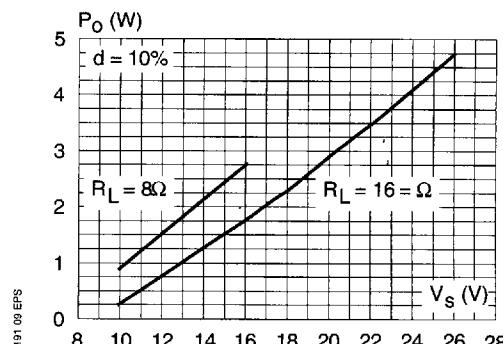**Figure 6 :** Audio Amplifier Frequency Response**Figure 8 :** Power Dissipation versus Supply Voltage (sine wave operation)**Figure 10 :** Quiescent Drain and Quiescent Output Voltage versus Supply Voltage**Figure 7 :** Output Power versus Supply Voltage**Figure 9 :** Power Dissipation and Efficiency versus Output Power