


MEAN WELL SWITCHING POWER SUPPLY ISO-9001 CERTIFIED MANUFACTURER

ADD-55 SERIES

.LOW COST, HIGH RELIABILITY .105°C OUTPUT CAPACITOR .INTERNATIONAL AC INPUT RANGE .HIGH EFFICIENCY, LOW WORKING TEN .SOFT-START CIRCUIT, LIMITING AC SU .SHORT CIRCUIT, OVERLOAD, BATTER	.100% Buil. IPERATURE RGE CURRENT	PACT SIZE, LIGHT , FULL LOAD BURI F IN EMI FILTER, L	N-IN TEST	NSE		00000	
MODEL	ADD-55A			ADD-55B			
SPECIFICATION	CH1	CH2	CH3	CH1	CH2	CH3	
DC OUTPUT VOLTAGE	13.8V	5V	13.4V	27.6V	5V	26.5V	
OUTPUT V. TOLERANCE	±1%	±3%		±1%	±3%		
OUTPUT RATED CURRENT	2.5A	3A	0.23A	1.3A	3A	0.16A	
OUTPUT CURRENT RANGE	0-3.5A	0-4A		0-2A	0-4A		
RIPPLE & NOISE	100mVp-p	100mVp-p		150mVp-p	150mVp-p		
LINE REGULATION	±1%	±0.5%		±1%	±0.5%		
LOAD REGULATION	±1%	±0.5%		±1%	±0.5%		
DC OUTPUT POWER		52.58W		55.12W			
EFFICIENCY	71%				74%		
DC VOLTAGE ADJ.	CH1:12-14.5V CH1:24-29V						
INPUT VOLTAGE RANGE	88~264VAC 47~63Hz; 120~370VDC						
AC CURRENT	1.6A/115V 1A/230V						
INRUSH CURRENT	COLD START 20A/115V 40A/230V						
LEAKAGE CURRENT	<1mA/240VAC						
OVERLOAD PROTECTION	105%~150% / 230VAC TYPE:PULSING-HICCUP SHUTDOWN RESET:AUTO RECOVERY						
OVER VOLTAGE PROTECTION	CH1:105%~135% TYPE:PULSE BY PULSE						
DC ALARM SIGNAL(OPTION)	AC FAIL CN1 PIN2 BATTERY LOW UNDER CHARGE VOLTAGE 82.5%±2% CN1 PIN1 NORMAL 0.8V MAX. ABNORMAL 5V±0.5V						
TEMP. COEFFICIENT	±0.03% / °C (0~50°C) ON CH1 OUTPUT						
SETUP, RISE, HOLD UP TIME	1.6s, 50ms, 16ms/115VAC 800ms, 50ms, 60ms / 230VAC						
VIBRATION	10~500Hz, 2G 10min./1cycle, PERIOD FOR 60min. EACH AXES						
WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC						
ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:500VDC / 100M Ohms						
WORKING TEMP., HUMIDITY	-10°C~+60°C(REFER TO OUTPUT DERATING CURVE), 20%~90% RH						
STORAGE TEMP., HUMIDITY	-20°C~+85°C, 10%~95% RH						
DIMENSION	159*97*38mm CASE:901						
WEIGHT	0.57Kgs						
SAFETY STANDARDS	MEET IEC950 REQUIREMENT (NOT APPLY FOR THE MARK)						
EMC STANDARDS	MEET CISPR22 (EN55022) CLASS B, EN61000-4-2,3,4,5,6,8,11,EN61000-3-2,-3						
NOTE : 1.ALL PARAMETERS ARE SPECIFIED AT 2.TOLERANCE GINCLUDE SET UP TOLE 3.RIPPLE & NOISE ARE MEASURED AT 2 4.LINE REGULATION IS MEASURED FR 5.LOAD REGULATION IS MEASURED FR 6.EACH OUTPUT PROVIDE UP TO MAXII 7.CH3 Bat. CHARGER VOLTAGE AT NO I	RANCE, LINE REGULAT 20MHz BY USING A 12" T DM LOW LINE TO HIGH L 20M 20% TO 100% RATE MUM CURRENT, BUT TO	ION, LOAD REGULATIOI WISTED PAIR TERMINA INE AT RATED LOAD. D LOAD, AND OTHER O TAL LOAD CAN NOT EX	N. TED WITH A 0.1uF & UTPUT AT 60% RATE	ED LOAD.		2000-12-07	

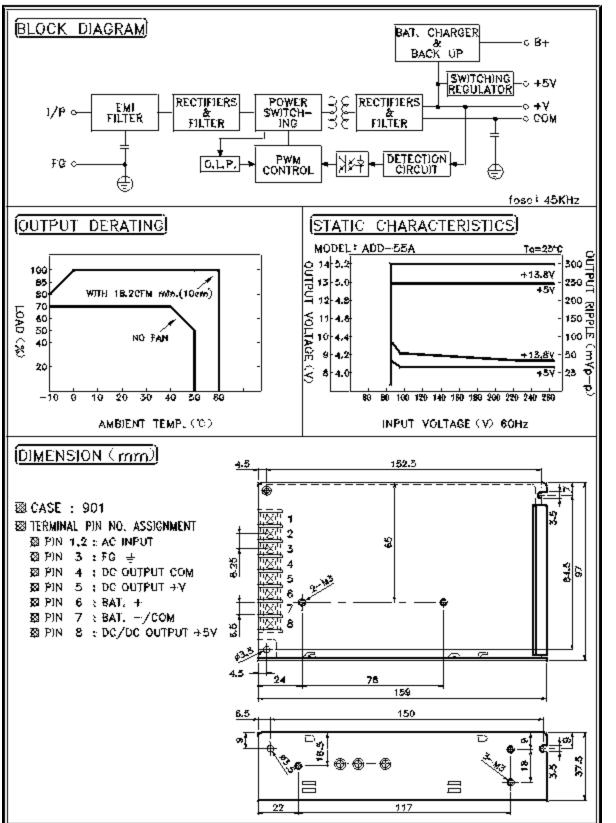

ADD-55 SERIES